


Proximity Smartcard Readers DR 4205-SC UNIVERSAL MIFARE SMART CARD READER

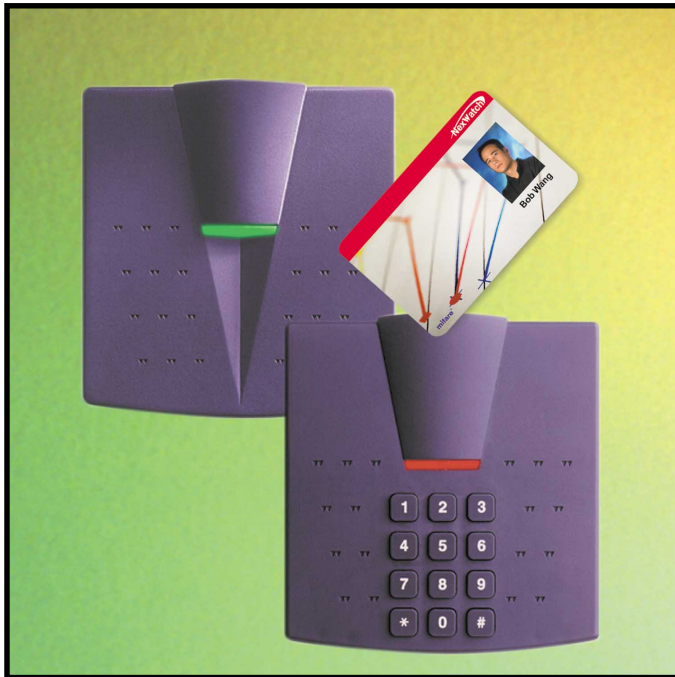

The **DR 4205 SERIES** brings an assortment of feature-packed DigiReader digital proximity readers into the high level of security and simplicity of any organization. Manufactured by the company that invented proximity access control technology, the DR4205 Series DigiReaders offer the latest advances in proximity Smartcard technology at a price that is competitive with less secure technologies, like magnetic stripe. All DR4205 Series DigiReaders provide several features: hands-free proximity for convenient access, extra level of security due to encrypted communication between reader and smartcard, password protected sectors, audible tones and programmable three-color LEDs for easy access status, advanced engineering for easy installation, and a design that is so attractive it won "Excellence in Design" awards from Business Week and Applied Manufacturing. Flexible options in the DR4205 Series include a proximity reader with an integrated keypad, weatherized versions and a Wiegand proximity reader. The DR4205 acts as the eye of complete access control and security management system solutions from the leading single-source manufacturer in the access control industry. From powerful security management software to advanced controllers, readers and ID credentials, all essential elements of NexWatch's systems are designed tested and built to work as synergistic components of a single system.

FEATURES

- Advanced-technology digital proximity Smartcard reader with flexible options:
 - Indoor and outdoor versions
 - Integrated keypad
 - Wiegand proximity
- Up to four-inch (10 cm) read range through wallet or purse
- Compatible with Mifare Standard Cards
- Support of various 13.65MHZ card types: Philips Mifare, Philips Mifare Light, Philips Mifare Pro, Philips Mifare ProX, Infineon, SLE55, SLE66CL, Legic, TagIt and I-Code
- High communication and transaction speed
- Anti-collision for multiple card handling
- Mutual authentication between reader and card
- Encrypted data communication on the air interface
- Downloadable communicationn firmware and reader configuration
- Unrestricted access to secured memory sectors
- Multiple card access key handling
- "MAD"=Mifare application directory MAD card file system support
- Easy installation
- Up to 4,000 feet between controller and reader
- Audible tone and programmable three-color LED activity signals
- Supports multi-drop bus or 5-wire Wiegand physical interface configuration
- Resistant to vandalism, weather, and harsh elements
- Low power consumption via S-Net wiring
- Part of a complete system solution
- Manufactured by the company that invented proximity access control
- Award-winning design

*System dependent

FEATURES AND SPECIFICATIONS

	DR4205SC	DR4205SCK
Description	Proximity SmartCard Reader	Proximity SmartCard Reader with integrated keypad
Dimensions	5.3x5.74x1.27in (13,3x14.6x3.2 cm)	5.3x5.74x1.5in (13,3x14.6x3.8 cm)
Maximum Read/Write Range*	Mifare Card: 4 in (10 cm)	
Exciter Field Frequency	13.56 MHz	
Receiver Frequency	212-848 kHz	
Receiver Demodulation	AM with Subcarrier	
Card read Cycle	50 ms	
Multiple card reading	Unlimited; physically: about 10 cards	
Power source	+ 12VDC to + 28 VDC	
Power consumption	3 W max , DCDC conversion	
Interface to controller	Dual twisted pair, RS485, S-Net communications	Dual twisted pair, RS485, S-Net communications; 26- or 34 bit 5-wire Wiegand standard; NexSentry Wiegand Interface Unit required
Indicators	Single three-color LED (green / amber / red); audible tone; programmable	
Tamper protection	YES	
Installation	Recessed, wall mount, rear wire access	
Operating Temperature	-20 to + 70°C	
Operating Humidity	10 % - 100 % condensing	
Weight	320 g	350 g
Color	Charcoal	
Case construction	High-impact Lexan; 94V-2 UL flame Class rating; UV resistant	

*Maximum read/write range may vary depending on physical environment of installation

*System dependent



MAIN OFFICE
 47102 Mission Falls Court
 Fremont, CA 94539
 510 360-7800
 510 360-7820 Fax
<http://www.nexwatch.com>

MIDWEST OFFICE
 5007 South Howell Avenue
 Milwaukee, WI 53207
 414 769-5980
 414 769-5989 Fax

EUROPEAN OFFICE
 Böblinger Straße 17
 D-71101 Schönaich
 Germany
 49-7031-637-782
 49-7031-637-769 Fax